

November 6, 2019

Dear Sir/Madam


RE: BACTERIOLOGICAL TESTING FOR WATERMAINS – AWWA C651

Effective January 1, 2020 the acceptable method for bacteriological testing of City of Nanaimo watermains shall be as follows:

1. First set of samples shall be taken a minimum of 16 hours after the last flush.
2. Second set of samples shall be taken minimum of 24 hours after the first set of samples. No additional water shall be added to the main until after the second set of samples have been taken.

Contractors and consultants are reminded that these requirements are not to be waived without prior notification and acceptance by the City.

Yours truly,

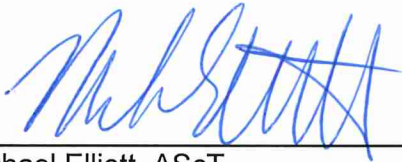

Michael Elliott, ASCT
Project Manager, Engineering & Public Works Department
Tel: 250-756-5321 Fax: 250-756-5336

cc B. Sims, Director, Engineering & Public Works
J. Elliot, Senior Manager, Public Works
P. Rosen, Engineering Senior Manager
P. Stewart, Engineering Manager
D. Mousseau, Manager, Engineering & Environment
M. Strain, Senior Project Manager
M. Squire, Water Resources Manager
C. Lang, Project Engineer, Engineering
D. Thompson, Manager, Construction Projects