

PLANT LIST

KEY	QTY.	BOTANICAL NAME	COMMON NAME	SIZE	ROOTS	COMMENTS
A	6	ACER RUBRUM 'ARMSTRONG'	RED ARMSTRONG MAPLE	6.0 CM CAL. / 3.5 - 4.0 M HT.	B & B	FULL, 1.8 M HT. STANDARD
B	29	MAHONIA AQUIFOLIUM 'COMPACTA'	COMPACT OREGON GRAPE	45 CM HT.	27 CM POT	FULL
C	20	PHYSOCARPUS OPULIFOLIUS 'LUTEUS'	GOLDEN NINEBARK	60 CM HT.	27 CM POT	FULL, EVENLY BRANCHED
D	28	POLYSTICHUM MUNITUM	SWORD FERN	60 CM HT.	27 CM POT	FULL
E	132	ARCTOSTAPHYLLUS URVA URSI	KINNIKINICK	30 CM SPR.	15 CM POT	MIN. 3 LEADERS, PLANT 45 CM O.C.

NOTE: PLANTS MUST MEET SIZE AND POT SPECIFICATION AND MAY EXCEED BCLNA STANDARDS. AREA OF PLANT MATERIAL SOURCING TO INCLUDE WESTERN NORTH AMERICA.

NOTES

- CONTRACTOR TO REPORT ALL ERRORS, OMISSIONS AND DISCREPANCIES TO LANDSCAPE ARCHITECT IMMEDIATELY AND PRIOR TO COMMENCEMENT OF WORK.
- CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE LOCATION OF ALL UNDERGROUND SERVICES AND ANY DAMAGE TO SAME CAUSED BY HIS WORK.
- CONTRACTOR TO ENSURE SMOOTH CONTINUOUS POSITIVE DRAINAGE AWAY FROM BUILDING TO ALL DRAINAGE PICKUP POINTS.
- ALL LANDSCAPED AREAS TO BE IRRIGATED WITH A FULLY AUTOMATIC UNDERGROUND IRRIGATION SYSTEM, COORDINATE IRRIGATION SLEEVES, TIMER CLOCK LOCATION AND WATER CONNECTIONS WITH GENERAL CONTRACTOR.
- COMPOST TO BE PLACED TO 75 MM DEPTH AFTER SETTLEMENT IN ALL PLANTING BEDS
- ALL LANDSCAPE WORK ON CITY PROPERTY TO CITY OF NANAIMO STANDARD AND APPROVAL.
- REFER TO ARCHITECTURAL/CIVIL FOR HARD LANDSCAPE & SITE GRADING.

RECEIVED
DP1271
2022-MAR-17
Current Planning

SUBMITTED FOR DEVELOPMENT PERMIT MARCH 02, 2022

NO.	DATE	BY	REVISION
1.	03/03/22	S.P. SRW	


DRAWN	S.P.
CHECKED	J.P.
DATE	MARCH 02, 2021
DRAWING	505 K-L1
FILE	



JOB NAME

505 KENNEDY

NANAIMO, B.C.

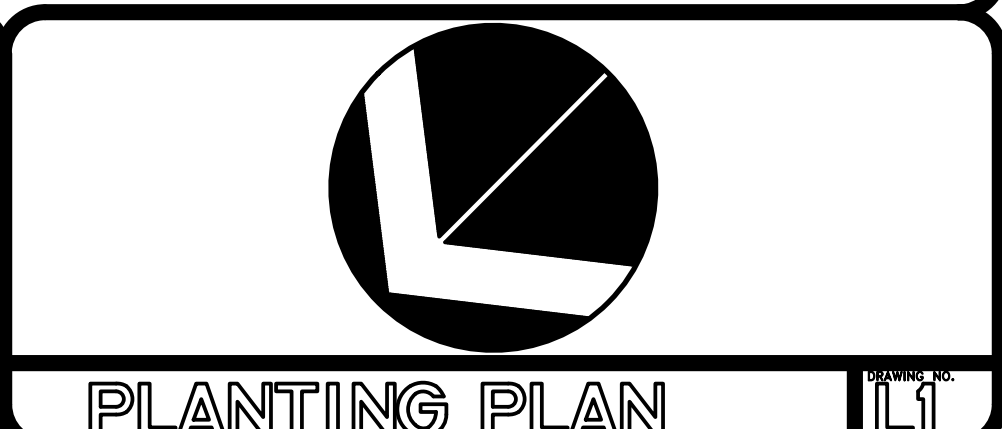

1 : 100